


BluE Series

Three Phase / On-grid / 10 kW



Max. PV Voltage up to 1100 V
Type II DC / AC SPD

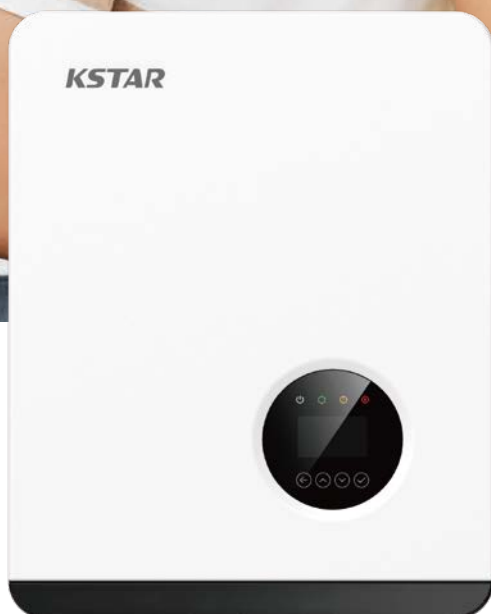

Compatible for Big Capacity PV Panel
WiFi / 4G Plug Optional



DC / AC Ratio up to 2
IP66 Protection



High Efficiency up to 98.6%
Smaller and Lighter



Anti-PID function
AFCI optional

MODEL	BluE-10KT-M1
Input(DC)	
Max. DC Voltage	1100 V
Nominal Voltage	650 V
Start Voltage ¹⁾	250 V
Number of MPPT	140 V ~ 1000 V
Strings Per MPPT	2
MPPT Voltage Range	1
Max. Input Current Per MPPT	15 A
Max. Short-circuit Current Per MPPT	20 A
Output(AC)	
Nominal AC Output Power	10000 W
Maximum AC Output Power	11000 VA ²⁾
Nominal AC Voltage	400 V 3L+N
AC Grid Frequency Range	50 / 60 Hz (±5Hz)
Maximum Output Current	16.0 A ²⁾
Power Factor(Φ)	0.8 leading - 0.8 lagging
THDi	3%
Efficiency	
Max. Efficiency	98.6%
Euro Efficiency	98.1%
Protection devices	
DC Switch	Yes
Output Over Current Protection	Yes
Anti-islanding Protection	Yes
DC Reverse Polarity Protection	Yes
String Fault Detection	Yes
DC / AC Surge Protection	DC Type II; AC Type III; Type II Optional
Insulation Detection	Yes
AC Short Circuit Protection	Yes
AFCI Function	Optional
PID Recovery	Optional
General Specifications	
Dimensions (W x H x D)	380 x 483 x 161 mm
Weight	< 17 kg
Operating Temperature Range	-25°C ~+ 60°C
Cooling Type	Natural cooling
Max. Operating Altitude	4000 m
Max. Operating Humidity	0 - 100% (No condensation)
AC Output Terminal Type	Connector
IP Class	IP66
Topology	Transformerless
Communication	RS-485 / Wifi / 4G
Display	LCD
Certification & Standard	EN/IEC 62109-1/2; IEC/EN 61000-6-2; IEC/EN 61000-6-4; IEC 61683; IEC 60068; IEC 60529; IEC 62116; IEC 61727; EN 50549-1; VDE-AR-N-4105; VDE 0126-1-1; CEI 0-21; G98/G99 ; C10/11; NB/T 32004-2018; GB/T 19964-2012

1) Minimum voltage for inverter to start power output.

2) According to the C10/11 of Synergrid, the maximum AC output power is 10 kVA and therefore the maximum AC output current is 14.5A.