




Monofacial

Bifacial

LP182*182-M-60-NB N-Type TOPCon Dual Glass

Rated Power 460-480W

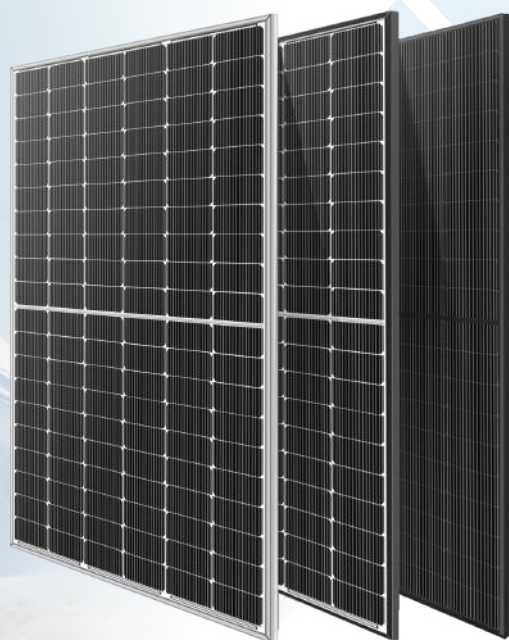

N-Type MBB Cell

New circuit design N-type cells, can increase the output power of 10W~20W



Low Light Features

Higher performance under low light environment.



Bifacial with dual glass

Module adopts 182*182mm half cells, bifacial module provide an additional 5%~25% output.



PID Protection

Ensure the attenuation probability caused by PID phenomenon is minimized.



Harsh Environmental Adaptability

Strict salt spray and ammonia corrosion test by TUV Nord.




Load Capacity

Mechanical load tests including wind load 2400 Pa and snow load 5400 Pa done by TUV Nord.

Leapton N-Type Linear Power Warranty Industry Warranty

0.4% Annual Degradation over 30 years

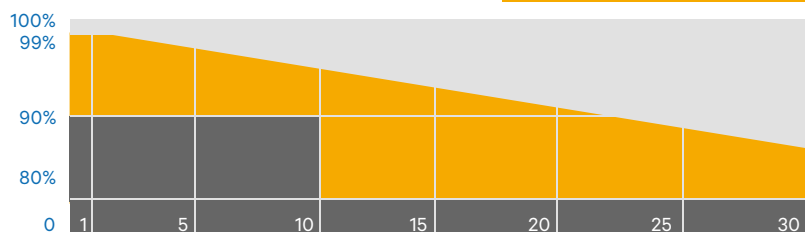

Headquarter : Leapton Energy Co., Ltd.

Tosei Bldg. 6F, 1-2-1 Aioi-cho, Chuo-ku Kobe-shi, Hyogo, 650-0025, Japan

Manufacturer : Leapton Solar (Changshu) Co., Ltd.

No.9, Sunshine Avenue, Changshu City, Jiangsu, China

+81-78-382-3182


www.leaptonenergy.jp

+86-512-88800068

info@leaptonenergy.com

www.leaptonpv.com

MECHANICAL DIAGRAMS

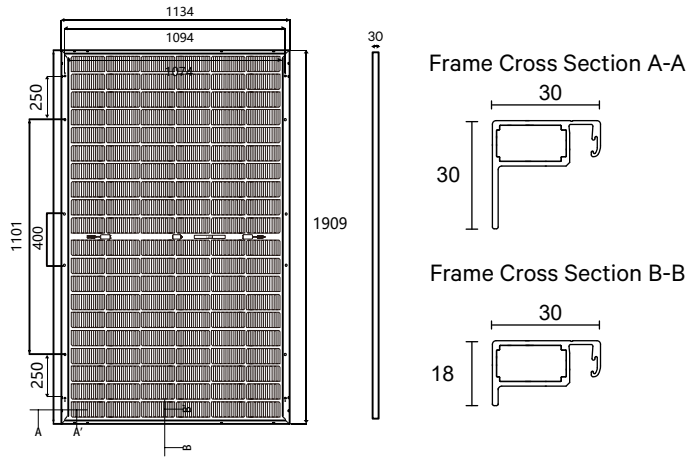

SPECIFICATIONS

Weight	26.5kg
Dimensions	1909mm*1134mm*30mm
Cell Dimensions	182*182mm
Cell Amount	60*2 pcs
Maximum System Voltage	1500V
Junction Box	IP68
Front glass	2.0mm, Anti-Reflection Coating
Back glass	2.0mm, Heat Strengthened Glass
Frame	Aluminum Alloy
Cable	4mm ² , N 1200mm/P 1200mm for Horizontal installation 4mm ² , N 300mm/P 300mm for Vertical installation
Connector	MC4 compatible
Bifaciality	80±5%

ELECTRICAL PARAMETERS AT STC

Power	460W	465W	470W	475W	480W
Open Circuit Voltage	42.30V	42.45V	42.60V	42.75V	42.90V
Short Circuit Current	13.81A	13.90A	13.97A	14.04A	14.12A
Maximum Power Voltage	34.72V	34.89V	35.03V	35.19V	35.32V
Maximum Power Current	13.25A	13.33A	13.42A	13.50A	13.59A
Module Efficiency	21.25%	21.48%	21.71%	21.94%	22.17%

* Under Standard Test Conditions (STC) of irradiance of 1000 W/m², spectrum AM 1.5 and cell temperature of 25°C.

ELECTRICAL PARAMETERS AT NMOT

Power	346W	350W	354W	358W	361W
Open Circuit Voltage	40.15V	40.30V	40.45V	40.60V	40.75V
Short Circuit Current	11.14A	11.21A	11.27A	11.33A	11.36A
Maximum Power Voltage	32.37V	32.53V	32.66V	32.82V	32.97V
Maximum Power Current	10.69A	10.76A	10.84A	10.91A	10.95A

* Under Nominal Module Operating Temperature (NMOT), irradiance of 800 W/m², spectrum AM 1.5, ambient temperature 20°C, wind speed 1 m/s.

ELECTRICAL PARAMETERS (AT 10% BIFACIAL POWER OUTPUT)

Output Power	506W	512W	517W	523W	528W
Open Circuit Voltage	42.30V	42.45V	42.60V	42.75V	42.90V
Short Circuit Current	15.29A	15.40A	15.46A	15.56A	15.63A
Maximum Power Voltage	34.73V	34.88V	35.03V	35.17V	35.34V
Maximum Power Current	14.57A	14.68A	14.76A	14.87A	14.94A

TEMPERATURE CHARACTERISTICS


NMOT	41±3°C	Temp Coefficient of ISC	+0.046%/°C
Temp Coefficient of VOC	-0.25%/°C	Temp Coefficient of Pmax	-0.30%/°C

PACKING CONFIGURATION


Modules/Pallet	36 Pieces	Modules/40'Container	864 Pieces
Packing Description	24 Pallets, Total=(36+36)x12=864 Pieces		

CHARACTERISTICS

LP182*182-M-60-NB-480W



LP182*182-M-60-NB-480W



MAXIMUM RATING

Output Tolerance	0~+5W
Operating Temperature	-40°C~+85°C
Wind Load/Snow Load	2400pa/5400pa
Fuse Current	25A



Headquarter : Lepton Energy Co., Ltd.

Tosei Bldg. 6F, 1-2-1 Aioi-cho, Chuo-ku Kobe-shi, Hyogo, 650-0025, Japan

Manufacturer : Lepton Solar (Changshu) Co., Ltd.

No.9, Sunshine Avenue, Changshu City, Jiangsu, China

+81-78-382-3182

www.leptonenergy.jp

+86-512-88800068

info@leptonenergy.com

www.leptonpv.com